Sefa
HEAT TRANSFER TECHNOLOGIES

ROTEX AIR RANGE
LITE / PRO V3

SmartTouch® Controller

Autoswing on Rotex Air Pro only

- Perfect heat & pressure distribution
- Single swing plate 40x50 cm (16x20")
- User friendly
- Complete clearance of the plate
- Pneumatic closing & opening
- Automatic rotation at the end of the cycle (Pro)
- Reversible C-shaped part & Quick Release
- Robust frame
- Suitable for laser transfer applications & sublimation on textile and rigid materials and pretratment
- Ideal for medium productions
- Manufactured in France
- 2-year guarantee on the machine
- 10-year guarantee on heating elements

Set programs

QuickRelease® system

3200W (PRO only)

Pneumatic

Pre-heat time

OPTIONAL ACCESSORIES

Support table

DTG plate

Set of 4 plates

Laser pointer

Teflon Sheet

Nomex® cover (included)



Shoe plate

Lower heating plate

Email
sales@sefa.fr
support@sefa.fr
www.sefa.fr

Phone
Office : + 33 4 68 74 05 89
Fax : + 33 4 68 74 24 08

Address
SEFA SAS
Z.I. PASTABRAC
11 260 ESPERAZA (FR)

FLEXDEV GROUP
TRANSFER YOUR IMAGINATION
Chemica | Stilscreen | Sefa | Elms | Sporting ID | TransferID

TECHNICAL CHARACTERISTICS

Type	Pneumatic
Operation	Swing - Rotating plate Autoswing on Rotex Air Pro
Platen size	40x50 cm / 16x20''
Max thickness	17 mm
Weight	81 Kg / 179 lbs
Pressure	400 gr/cm²
°C / °F Max	220 °C / 429 °F
Power	2500 W (Rotex Air Lite) 3200 W (Rotex Air Pro)
Power supply	240 V Single-phase
Amperage	11 A (Rotex Air Lite) 14 A (Rotex Air Pro)
Applications	ChromaLuxe, Flex, Direct to Garment, Pretreatment, Sublimation Rigid Substrate, Textile Sublimation, Screen Printing, Laser Transfer
Dimensions	621x847x572 mm

OPTIONAL ACCESSORIES

TAB-98 LITE
Support table

PLA-DRY M
Sponge plate to dry pretreated clothes.

PLA-SET
Set of 4 plates
12 x 8 cm, 15 x 15 cm,
12 x 45 cm, 25 x 30 cm.

CROI-161
Laser system to place your transfers with more precision (1 extra laser can be added).



PLA-SHOES-CV
Special plate that fits textile and sport shoes (side and back).

ACC-CHAUD-INF
Lower 40 x 50 cm heating plate that fits all SEFA presses (individual electronic box included).

COMP-37
Silent compressor 40dB
24L - 37 L/min.

SETTINGS

New SmartTouch® controller developed by Sefa

Recipes menu with adaptive regulation parameters depending on the job: flex, sublimation on textile, sublimation on rigid substrates, DTG...

Advanced electronics
- Fully editable recipes menus
- Multi timer (up to 2 different times)
- Cycle counters
- Stop cycle function
- ECO GREEN mode

From 0 to 600 sec (precision +/- 1%).
From 15 to 220°C (precision +/- 1%).
Heating time to reach 180°C : 10 min.

180° reversible C-shaped lower part with Quick Release system

DIMENSIONS

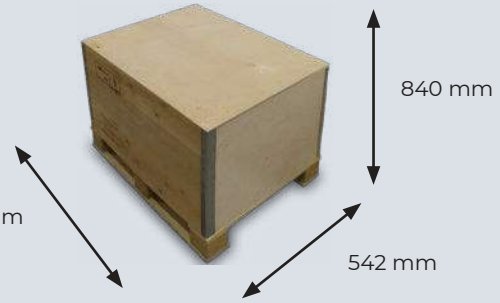

Box weight CAI-100 : 25 kg

Non contractual document - Depending on changes in range, we reserve the right to modify the characteristics of our products.